

NANXU ELECTRIC

AUTOMATIC ADJUSTABLE
EASY TO INSTALL
RELIABLE
MAINTENANCE FREE
ENVIRONMENTAL PROTECTION

WIRING CONNECTION

black

○ blue = the "ON" switch action below is to fill

○ brown = the "ON" switch on high is to empty

to empty: core connection
BLACK/BROWN

to fill: core connection
BLACK/BLUE

TECHNICAL DATA

Microswitch:

Switch current:


Protective connection:

Protection:

Max. temperature:

Working pressure:

circuitbreaking capacity:



10(8)A 250V~10(4)A 380V



» 50000 switch workings





waterproof

70°C

max. 1bar

directly 2KW with 250V

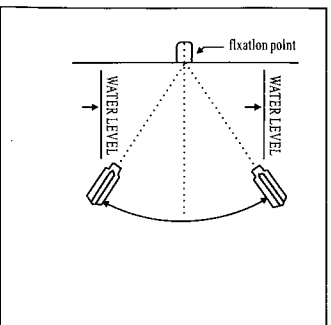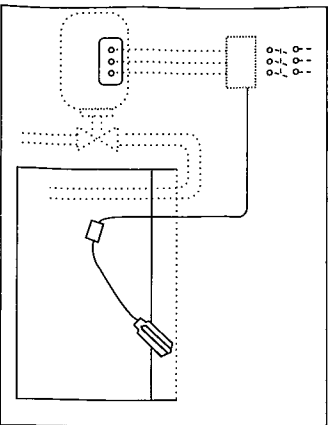

EASY OPERATION

The desired "ON" or "OFF" differential is obtained by simply lengthening or shortening the free cord fixation point.

"ON" and "OFF" switch action may be adjusted to any desired liquid level by moving the cord fixation in up or down direction

APPLICATION

The float switch "TISE" is a switch which regulates fluid level in the tank or well etc. The float switch is resistant to water (sewage water), it is relative capable of being used for oil, most acids and alkalis. The float switch is not explosion proof